

## MODULE 3000

PB-M3K 1.0.01


ClimateMachines™ MODULE 3000 is a modular air handling unit that provides a reliable indoor climate all year round with the highest thermal efficiency and lowest operation cost on the market. The heart of the unit is a polycarbonate heat exchanger working crossflow in two steps.

The use of high-quality materials allows employment of a special pressure setup with pushing supply fans and pulling extract fans. This guarantees 0% contamination between supply air and extract air\*. Combined with a low airflow through the heat exchanger this leads to high performance with 90% thermal efficiency.

The indirect evaporative cooling system provides a high cooling capacity which significantly reduces or even eliminates the need for additional cooling units or district cooling.


\* Verified by RISE, <https://www.ri.se/en>

### Thermal Efficiency Comparison

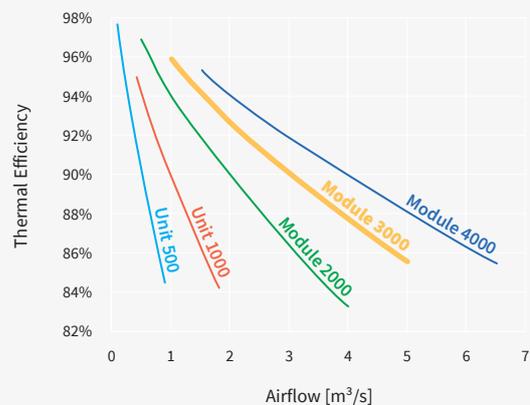


# Performance

## Winter Conditions Heat Recovery

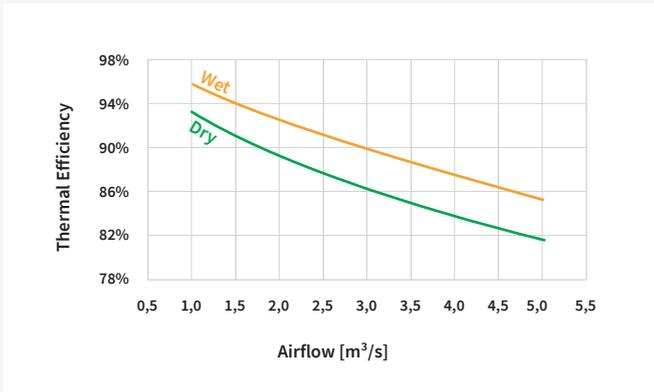

## Summer Conditions Evaporative Cooling

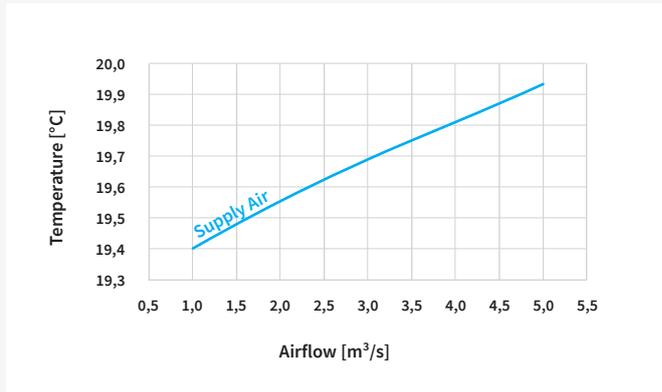

## Dimensioning Conditions Winter

Wet	T [°C]	RH [%]	Airflow [m³/s]
Outdoor Air	-20	80	1,0 - 5,0
Extract Air	22	30	1,0 - 5,0

Dry	T [°C]	RH [%]	Airflow [m³/s]
Outdoor Air	5	80	1,0 - 5,0
Extract Air	25	27	1,0 - 5,0

## Dimensioning Conditions Summer

	T [°C]	RH [%]	Airflow [m³/s]
Outdoor Air	27	50	1,0 - 5,0
Extract Air	23	60	1,0 - 5,0

## Control & Monitoring System

ControlMachines™ is a control, monitoring and data collection system that meets modern demands on user-friendliness, accessibility and security.

ControlMachines™ is developed with the user experience in focus, for real-time monitoring and analysis of energy installations and facilities. The control system visualises performance and enables easy optimisation of facility operations.

The client software is web-based which provides you with a straightforward solution for remote control and monitoring of your facilities. All devices connected to the Internet with modern web browsers can access ControlMachines™.



## Connections

### Ventilation

Connection	Dimension	Type
Exhaust Air	Project dependent	Flange
Outdoor Air	Project dependent	Flange
Supply Air	Project dependent	Flange
Extract Air	Project dependent	Flange

### Plumbing

Connection	Dimension	Type
Evaporative Cooling	DN20	PP
Waste Water	DN50	PP
Coil Heat Exchanger	Project dependent	Project dependent


### Electricity

Supply Voltage	3~400 VAC
Power Rating	Project dependent
Ampacity	Project dependent
Inrush Current	Project dependent
Overcurrent Protection	Project dependent

# Dimensions

The illustrations show Module 3000 in the left-handed version.  
The unit is also available in a right-handed version.

📏 Weight: 3500 - 5200 kg

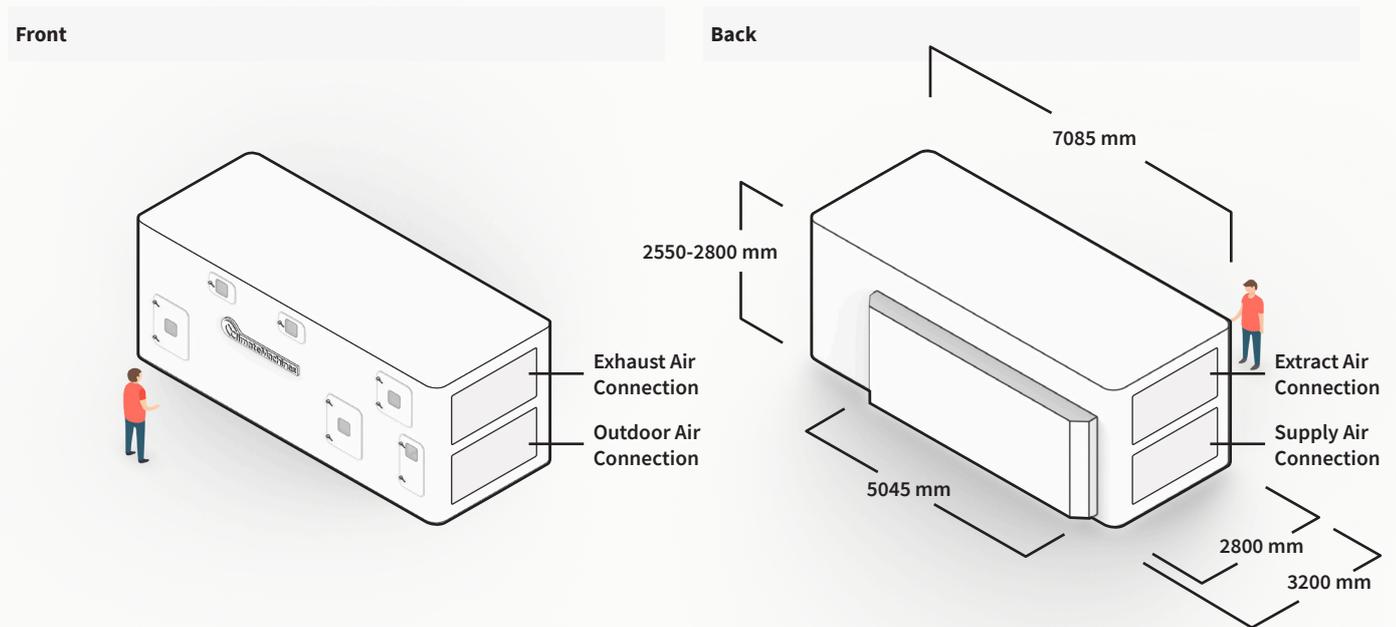

## List of Components

### Standard

Component	Type	Model
Crossflow Heat Exchanger	Polycarbonate, Two-step	3000
Unit Casing	Sandwich 50 mm	EPS
Fans SF/EF (2+2)	EC Centrifugal Fan	-
Supply Air Filter	Compact Filter F7	-
Bypass Damper SA/Ext. A	Comfort Damper	Leakage Class 4
Control System	ControlMachines	Logic
Monitoring System	ControlMachines	Scada

### Optional

Component	Type	Model
Fire Resistant Unit Casing	Sandwich (EI30 or EI60)	Mineral Wool
Extract Air Filter	Compact Filter M6	-
Fan Shut-off Dampers	Comfort Damper	Leakage Class 4
Panel	23" Touch Screen	-
Finned Coil Heat Exchanger	Project dependent	-
Service Lighting	LED	-

### Additional options

Indirect Evaporative Cooling	Efficient cooling that cuts peak power consumption using only water
Video Monitoring	Remote visual confirmation of operation (e.g. bypass dampers)
Outdoor Adaptation	For outdoor installations
Color Shifting LED	Indicates operating condition and performance
Lockable Doors	For placement in publicly accessible areas
Energy System Support	Service agreement, including performance reports

